All TCE products carry a two (2) year limited warranty.

MODEL: T7000-4 SERIES HOBBY / PARKING LIFT

Post - 7,000 Lbs 4 POST NARROW

#	Key Specs	T7000-4N US Imperial (in) (lbs)	T7000-4NT (TALL) US Imperial (in) (lbs)
	Lift Capacity	7,000-lbs	7,000-lbs
A	Overall length	200.48	235.5
*	Overall Length Plate to Plate	175.03	209.5
B	Overall width	107.51	107.5
C	Overall height	92	105
D	Overall height of posts	87.8	101.58
E	Max. lifting height to top of runways	75.5	89.2
F	Max. clearance under runways on top of lock	69	83
G	Minimum ground clearance	5.5	5.5
H	Approach ramp length	34.5	34.5
I	Runway dimensions length	166	201.57
J	Runway dimensions width	18.92	18.92
K	Runway dimensions height	4.68	4.68
L	Outside width of both runways	69.4 / 75.6	69.4 / 75.6
M	Clearance between runways	31.6 / 37.9	31.6 / 37.9
N	Overall width outside of posts	102	102
O	Max. clearance between posts	92	92
P	Ramp gauge of steel	1/4"	1/4"
Q	Post dimensions length	6	6
R	Post dimensions width	5	5
	Locking positions (qty.)	13	18
	Time of full rise (seconds)	60	70
	Motor phase(s)	1 Phase	1 Phase
	Voltage	220	220
	Htz	60	60
	Manufacturer warranty	2 Year Limited	2 Year Limited
	Gross weight	1480	1720
	Shipping dimensions L x W x H (in.)	167.3 x 27.9 x 20.9	201.4 x 27.9 x 20.9

Features and Benefits

- 7,000 lbs. lifting capacity
- Excellent choice for parking precious vintage cars, hot rods, and OHV off-road vehicles
- High-end Commercial Grade synchronizing safety latch system offers a unique two position locking mechanism
- Air locking system
- Removeable detachable tilting approach ramp
- Large heavy-duty 3" cylinder
- Aircraft quality lifting cables

What's Included	Qty
Complete lift	(1)
Air locking system	(1)
Anchor bolts	(16)
Hydraulic power unit	(1)
Drip Trays	(3)

- ***Air Compressor Not Included***

Water Resistant Power Switch

Air Locking System



Detachable Tilting Approach Ramp

(3) DripTrays Included



CSA Rated Power Unit

Optional: T4-5 Caster Kit (QTY-4)

Meets and conforms to all standards for CAN/CSA C22.2 NO.68 and CE Ref. No. EN1493-2010 requirements for Garage Equipment

TORIN COMMERCIAL EQUIPMENT

4 Post Garage Lift
Design & Layout, Floor Plan

4355 E. Brickell St.,
Ontario, CA 91761
Monday - Friday
8 AM - 5 PM PST
Call 1-888-448-6746

Founded in 1954 Torin® produces quality automotive products for service professionals. As a manufacturer, a marketer and a developer of automotive maintenance equipment and automotive products. Torin® strives to provide our customers with the highest level of customer service and quality products. For many years we have been considered by people throughout the garage industry as being the premier lifting equipment and toolbox manufacturer. Our newest brand "TCE" brings the professional market the same pride, dependability and service, automotive professionals have trusted for the last 50 years.

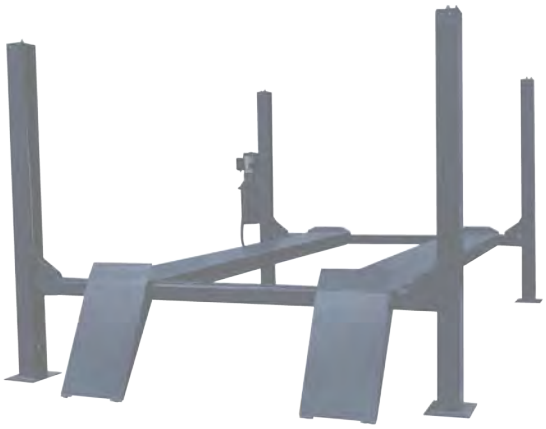

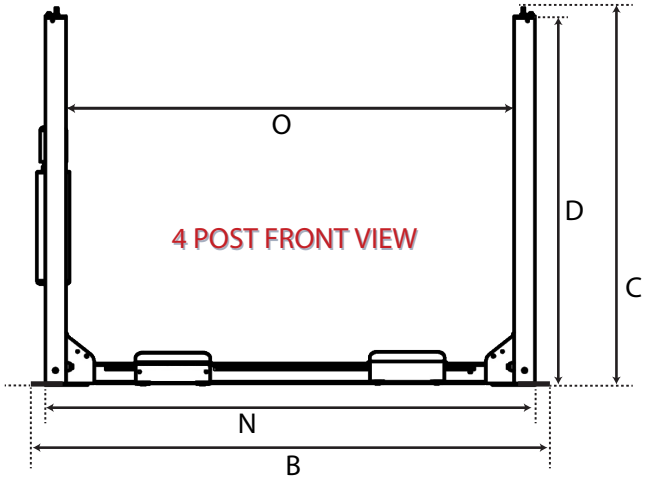

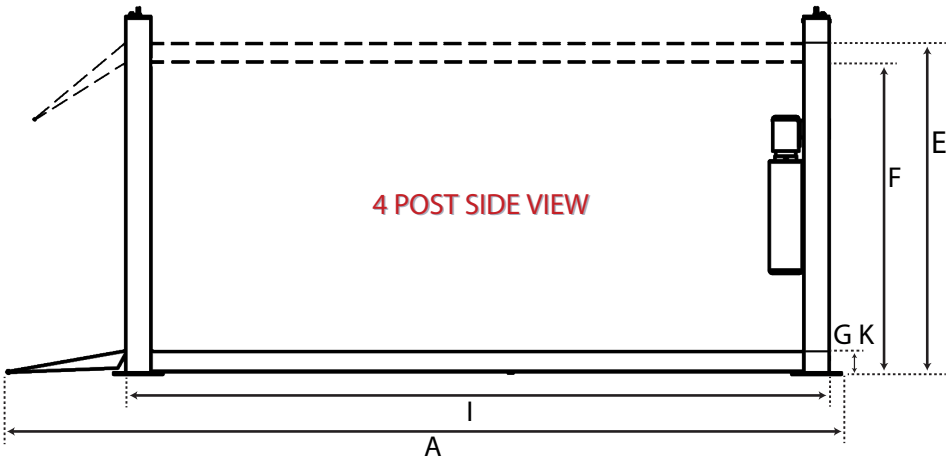

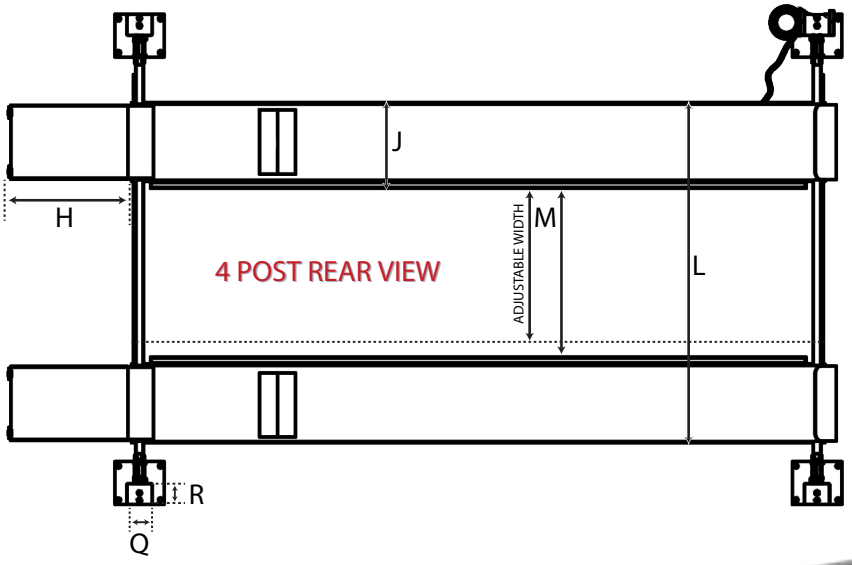

4 Post Parking Lift

7,000 lbs Car Lift



T7000-4N
7,000 lbs Capacity

Features and Benefits:

- Ladder Lock System
- Commercial Grade Synchronizing Safety Latch System offers a unique two position locking mechanism
- Air locking system
- Detachable Tilting Approach Ramp
- Large Heavy Duty 3" Cylinder
- Aircraft Quality Lifting cables
- Matted Powder Coat Finish

Meets and Conforms to all Standards for ANSI/ALI ALCTV, ANSI/U.L. 201, CAN/CSA C22.2 NO.68 and CE Ref. No. EN1493-2010 requirements for Garage Equipment

T7000-4N

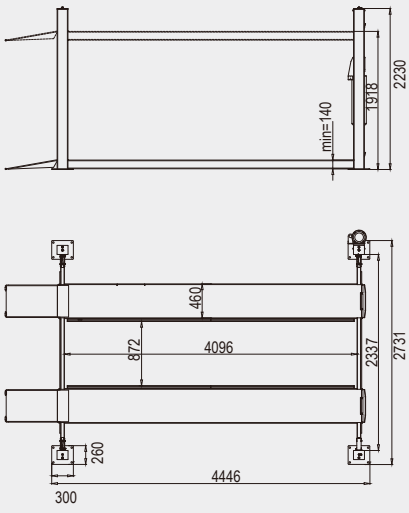

Model	T7000-4N(QJYJ4030)	
Capacity	7,000LBS	3000KG
Min ground clearance	5-1/2"	140mm
Max ground clearance	75-1/2"	1918mm
Rise time		60 sec.
Drop time		45 sec.
Amps		30 amps
Power supply		220V/380V
Runway length	161-1/4"	4096mm
Runway width	18-1/8"	460mm
N.W. weight	1565LBS	710Kg
Hydraulic		N46#
Package size	1#167-5/16"*27-15/16"*20-7/8"	1# 4250*710*530mm
	2#35-7/16"*11-7/16"*12-3/16"	2# 900*290*310mm
G.W	1598LBS	725kg

4 Post Parking Lift

7,000 lbs Car Lift



T7000-4NT
7,000 lbs Capacity

Features and Benefits:

- Ladder Lock System
- Commercial Grade Synchronizing Safety Latch System offers a unique two position locking mechanism
- Air locking system
- Detachable Tilting Approach Ramp
- Large Heavy Duty 3" Cylinder
- Aircraft Quality Lifting cables
- Matted Powder Coat Finish

Meets and Conforms to all Standards for ANSI/ALI ALCTV, ANSI/U.L. 201, CAN/CSA C22.2 NO.68 and CE Ref. No. EN1493-2010 requirements for Garage Equipment

T7000-4NT

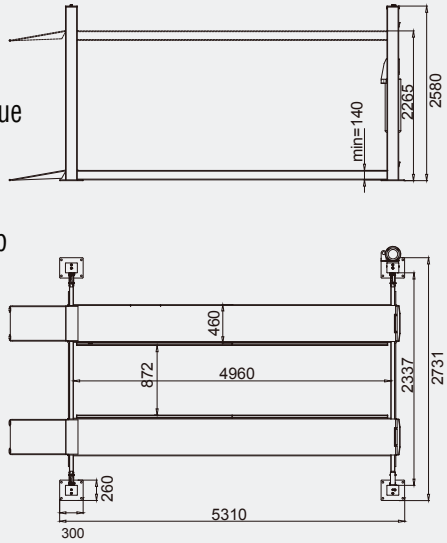

Model	T7000-4NT(QJYJ4030H)
Capacity	7,000LBS 3000KG
Min ground clearance	5-1/2" 140mm
Max ground clearance	89-3/16" 2265mm
Rise time	60 sec.
Drop time	45 sec.
Amps	30 amps
Power supply	220V/380V
Runway length	161-1/4" 4096mm
Runway width	18-1/8" 460mm
N.W.	1631LBS 740Kg
Hydraulic	N46#
Package size	1#201-9/16"*27-15/16"*20-7/8" 1# 5120*710*530mm
	2#35-7/16"*11-7/16"*12-3/16" 2# 900*290*310mm
G.W	1664LBS 755kg